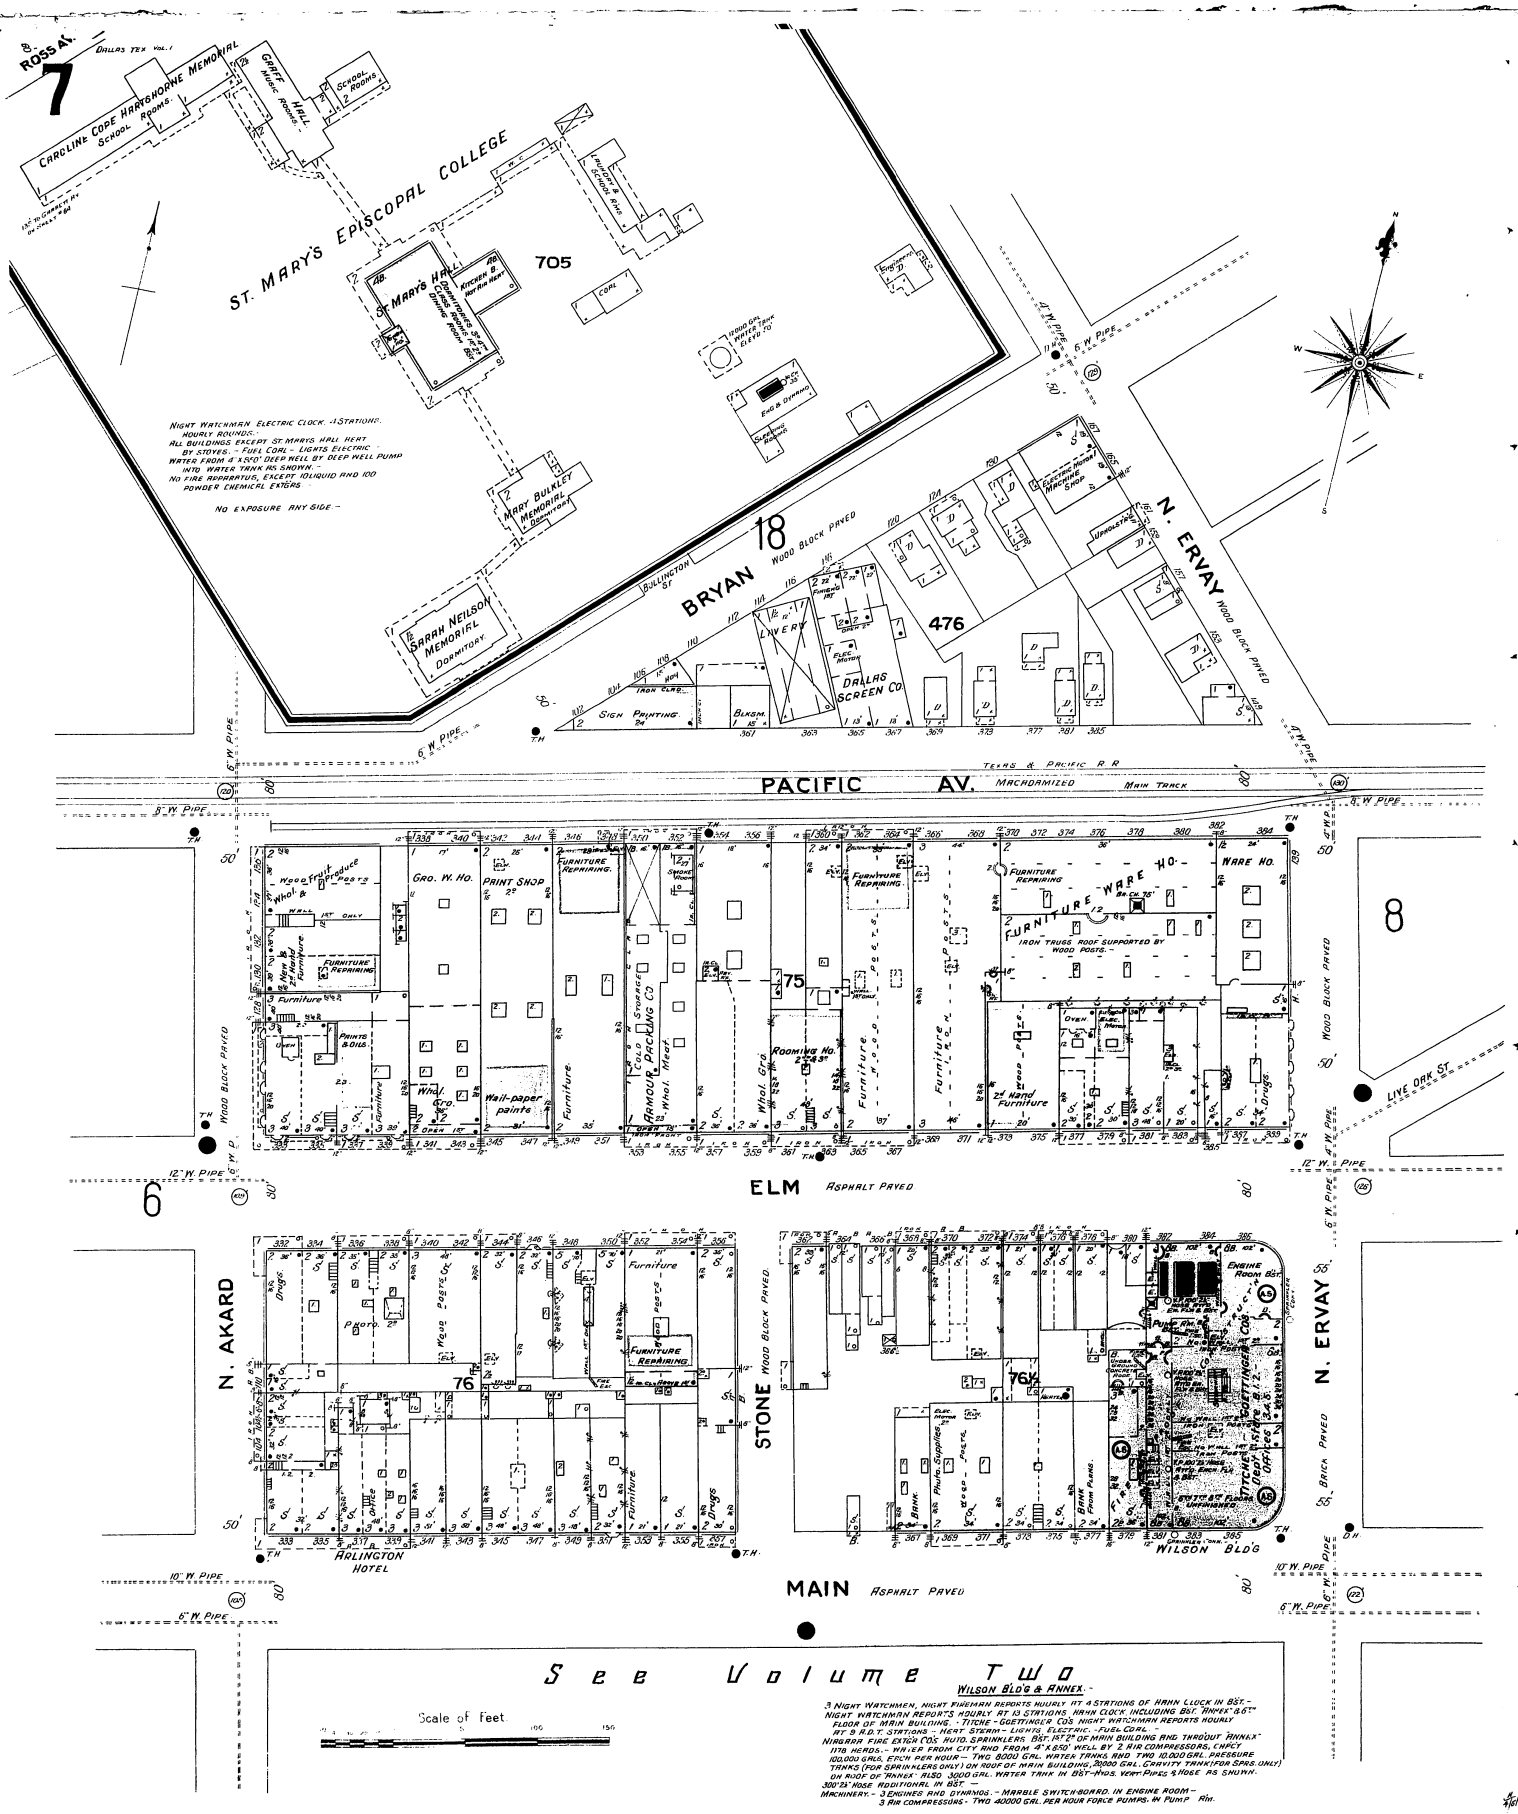
ROSS AV.
7
DALLAS TEX VOL. I
CAROLINE COPE HARGROVE MEMORIAL
SCHOOL ROOMS
GRAFF MUSIC ROOMS
SCHOOL ROOMS
ST. MARY'S EPISCOPAL COLLEGE
ST. MARY'S HALL
KITCHEN & DINING ROOM
705
CONC
ENG & DYNAMO
SWIMMING POOL
MARY BULKLEY MEMORIAL DORMITORY
SARAH NEILSON MEMORIAL DORMITORY
NIGHT WATCHMAN ELECTRIC CLOCK. 1 STATION.
HOURLY ROUNDS.
ALL BUILDINGS EXCEPT ST. MARYS HALL HEAT
BY STOVES. - FUEL COAL - LIGHTS ELECTRIC
WATER FROM 4" X 850' DEEP WELL BY DEEP WELL PUMP
INTO WATER TANK AS SHOWN.
NO FIRE APPARATUS, EXCEPT 10 LIQUID AND 100
POWDER CHEMICAL EXTGRS.
NO EXPOSURE ANY SIDE -
BRYAN
18
WOOD BLOCK PAVED
BURLINGTON ST
LIVERY
DALLAS SCREEN CO
476
SIGN PRINTING
BLKSM.
N. ERVAY
WOOD BLOCK PAVED
PACIFIC AV.
TEXAS & PACIFIC R R
MACADAMIZED
MAIN TRACK
GRO. W. HO.
PRINT SHOP
FURNITURE REPAIRING
ARMOUR PACKING CO.
WHOL. MEAT
WHOL. GRO.
ROOMING HO.
FURNITURE WARE HO.
IRON TRUSS ROOF SUPPORTED BY WOOD POSTS.
WARE HO.
WALL-PAPER PAINTS
2d HAND FURNITURE
DRUGS
PAINTS & OILS
8
LIVE OAK ST
ELM
ASPHALT PAVED
6
N. AKARD
76
PHOTO.
ARLINGTON HOTEL
STONE
WOOD BLOCK PAVED
76½
BANK
PHOTO SUPPLIES
ENGINE ROOM
SWITCHBOARD
WILSON BLDG
N. ERVAY
BRICK PAVED
MAIN
ASPHALT PAVED
See Volume Two
WILSON BLD'G & ANNEX.
3 NIGHT WATCHMEN, NIGHT FIREMAN REPORTS HOURLY AT 4 STATIONS OF MAIN CLOCK IN BST.
NIGHT WATCHMAN REPORTS HOURLY AT 13 STATIONS MAIN CLOCK INCLUDING BST. "ANNEX" & 6TH FLOOR OF MAIN BUILDING. - TICKS - GOETTINGER CO'S NIGHT WATCHMAN REPORTS HOURLY AT 8 R.D.T. STATIONS - HEAT STEAM - LIGHTS ELECTRIC. - FUEL COAL.
NIAGARA FIRE EXTGR. CO'S AUTO. SPRINKLERS. BST. 1ST 2D OF MAIN BUILDING AND THROUGHOUT ANNEX 1178 HEADS. - WATER FROM CITY AND FROM 4" X 850' WELL BY 2 AIR COMPRESSORS, CAPCY 100,000 GALS. EACH PER HOUR - TWO 8000 GAL. WATER TANKS AND TWO 10,000 GAL. PRESSURE TANKS (FOR SPRINKLERS ONLY) ON ROOF OF MAIN BUILDING, 20000 GAL. GRAVITY TANK (FOR SPRS. ONLY) ON ROOF OF ANNEX ALSO 3000 GAL. WATER TANK IN BST-HDQS. VERT. PIPES & HOSE AS SHOWN.
300 FT. HOSE ADDITIONAL IN BST. -
MACHINERY. - 3 ENGINES AND DYNAMOS. - MARBLE SWITCHBOARD. IN ENGINE ROOM -
3 AIR COMPRESSORS - TWO 40000 GAL. PER HOUR FORCE PUMPS. W. PUMP AM.
Scale of Feet
0
100
150